


GPRS-3G internet connection setup for Personal Computers (3G Modems - Mac OS - Apple)

Bellow you can read the instructions for setup your Mac OS Laptop or Personal Computer for DATA usage of **Businessim card (super date or regular)** with USB Modem 3G.

- Plug in your USB modem. It goes in the USB port.
- Open System Preferences and go to 'Network'.
- Your USB modem (HUAWEI E220...) should be listed in the pane (as below picture 1.)



-
-
-
- Highlight the Huawei window and select 'Advanced'. The below picture 2 will appear.
-

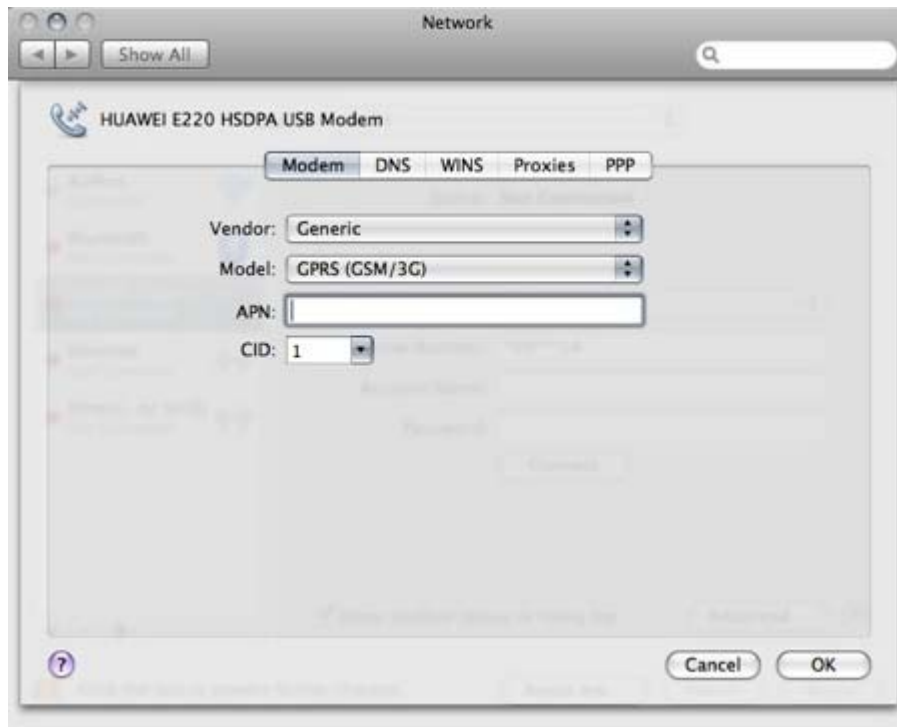

- At the Huawei window as show above highlight the “modem.
- Change vendor to ‘Generic’.

Set ‘Model’ to ‘GPRS (GSM/3G)’. Now ‘APN’ will appear and you can fill it with information bellow:

For Businessim REGULAR

- Access Point Name (APN): send.ee
- User name: enter your Businessim number, e.g. 3721231234
- Password: leave the field blank

For SUPER DATA Businessim

Access Point Name (APN): apn

- User name: leave the field blank
- Password: leave the field blank
-
- Press ok and the first picture 1 will appear again.



This window should show as follows :

Location to show automatic.

Configuration to show default

Telephone number to show: *99#

- Account name :
- a/ in case of regular businesim card to show your number (without + or 00 at front) : 372xxxxxx.
- b/ in case of SUPER DATA businesim card to be left empty.

Password to be left empty.

- After entering your APN (and other network settings should they be required) and set telephone number (*99#) and credentials. Click on 'Apply' and click on OK.

Click **Apply** and then click the **Connect** button back on the Network Preferences window, and you should be able to connect.